

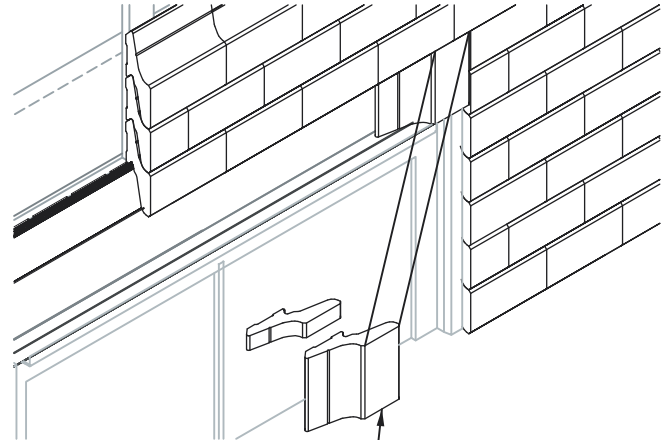


4.3- INSTALLATION AROUND OPENINGS
4- SOLDIER COURSE

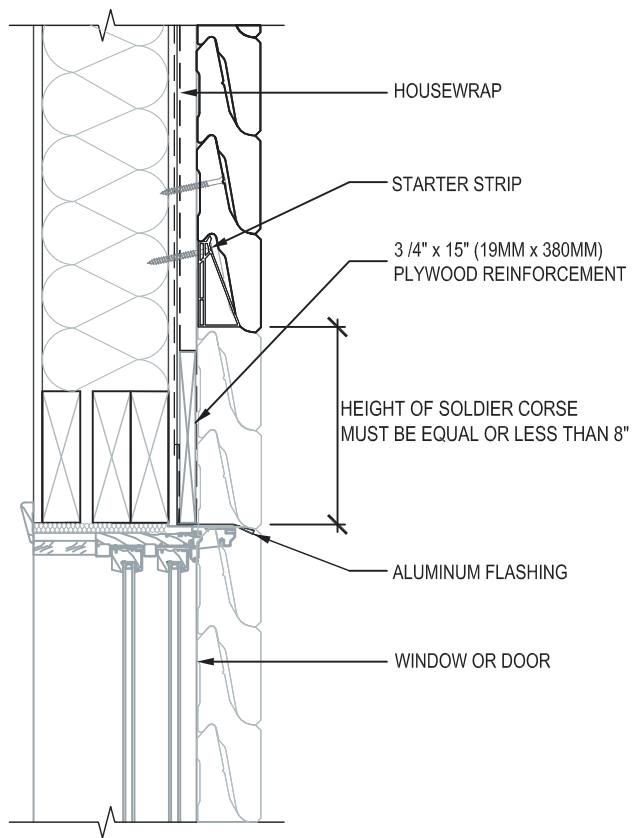

CUT NOVABRIK TO ADJUST SPECIFIC HEIGHT AND FASTEN WITH 2 SCREWS PER BRICK ON THE HEADER REINFORCEMENT

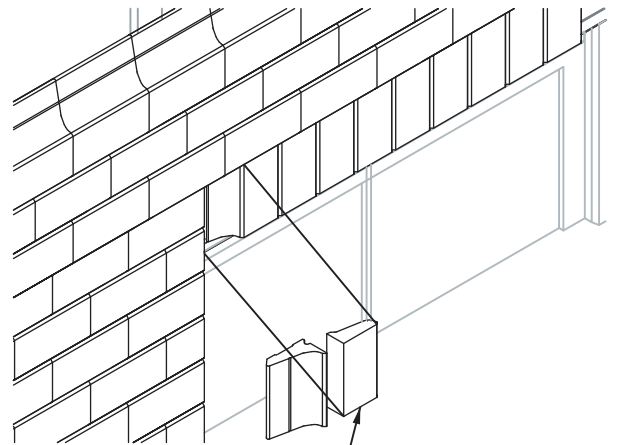

CUT NOVABRIK TO ADJUST SPECIFIC HEIGHT AND FASTEN WITH 2 SCREWS PER BRICK ON THE HEADER REINFORCEMENT