


4.5- Installation on CMU walls 1- Typical CMU wall

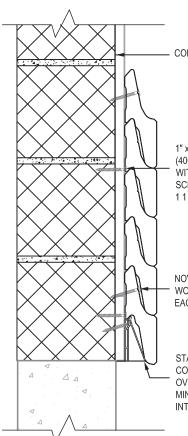



- CONCRETE MASONRY UNIT (CMU) BLOCK WALL

1" x 3" (19MM x 64MM) WOOD FURRING AT 16" (400MM) C/C FASTENED AT 10" (254MM) C/C WITH CORROSION RESISTANT CONCRETE SCREWS, WITH A MINIMUM PENETRATION OF 1 1/4" (32MM) INTO STRUCTURE.

NOVABRIK FASTENED WITH NO.10 x 2 1 /2 (64MM) WOOD SCREWS AT EVERY FOURTH COURSE AT EACH FURRING STRIP.

STARTER STRIP FASTENED WITH 3 /16" (5MM) CORROSION RESISTANT CONCRETE SCREWS OVER EACH VERTICAL FURRING STRIP WITH A MINIMUM PENETRATION OF 1 1 /4 (32MM) INTO STRUCTURE.

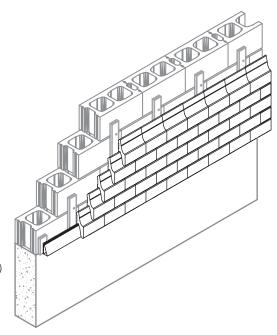

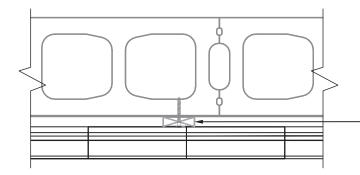

1" x 3" (19MM x 64MM) WOOD FURRING AT 16" (400MM) C/C FASTENED AT 10" (254MM) C/C WITH CORROSION RESISTANT CONCRETE SCREWS, WITH A MINIMUM PENETRATION OF 1 1/4" (32MM) INTO STRUCTURE.